

Nissan Titan Headlight Bulb Replacement

Tools Needed

- Flat-head screw driver
 - 8 mm socket
 - Needle-nose or slip-joint pliers
 - Flashlight (Optional)
-

Open the hood.

The first step is to remove the grill. It is held on by 8 square clips along the top and bottom, and 4 clips on the sides that snap into the headlight housing.



Using a flat-head screwdriver, rotate each of the 8 square clips by 1/8 turn (in either direction) and gently pull on the grill until the square head slips trough the slot. To access the lower clips, you will have to look in the big opening below the grill. This is where the flashlight may be useful.

Once you've loosened the 8 square clips, you will need to unsnap 2 clips located on both ends of the grill. The following photo shows where the clips are snapped into.




From behind, use a flat-head screwdriver to press on the side of the clip and gently pull on the grill to unsnap it from the hole. Repeat for the lower clip. Again a flashlight may be useful to locate the lower clip. The end of the grill should be completely free. Now unsnap the two clips on the other end of the grille and remove the grille.




Next remove three of the four bolts that hold the headlight in place. One is on top.



One on the front.

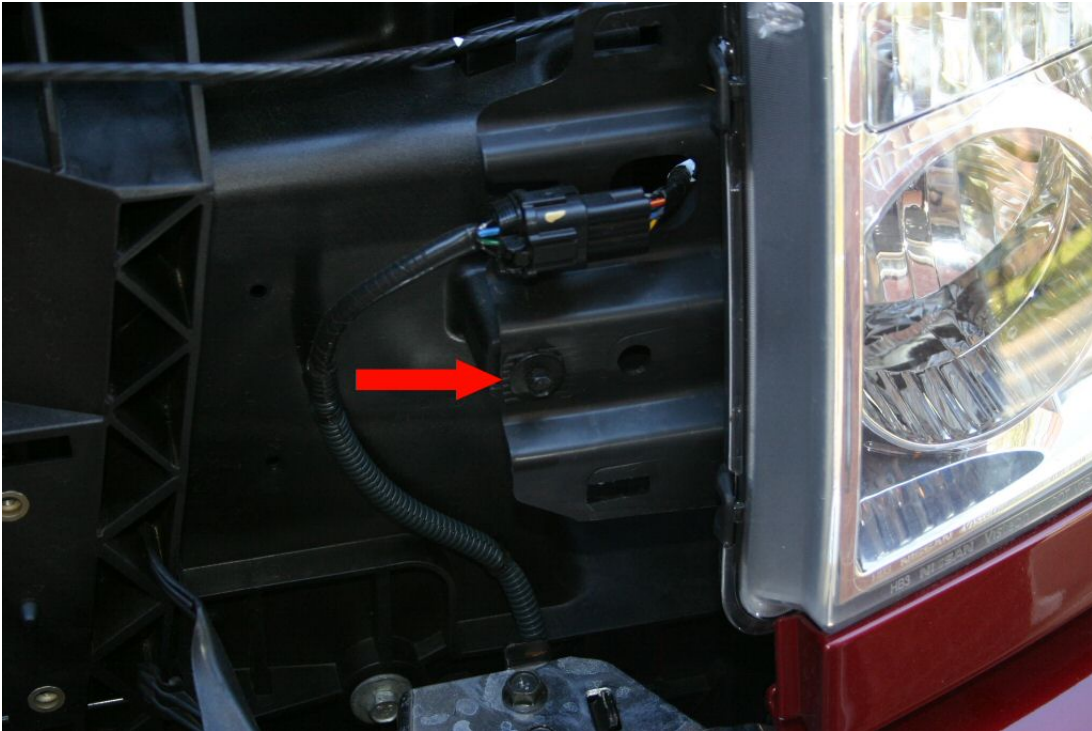

To remove the third bolt, you will need to lie on the ground and look up behind the headlight. You may need the flashlight again to see the bolt.

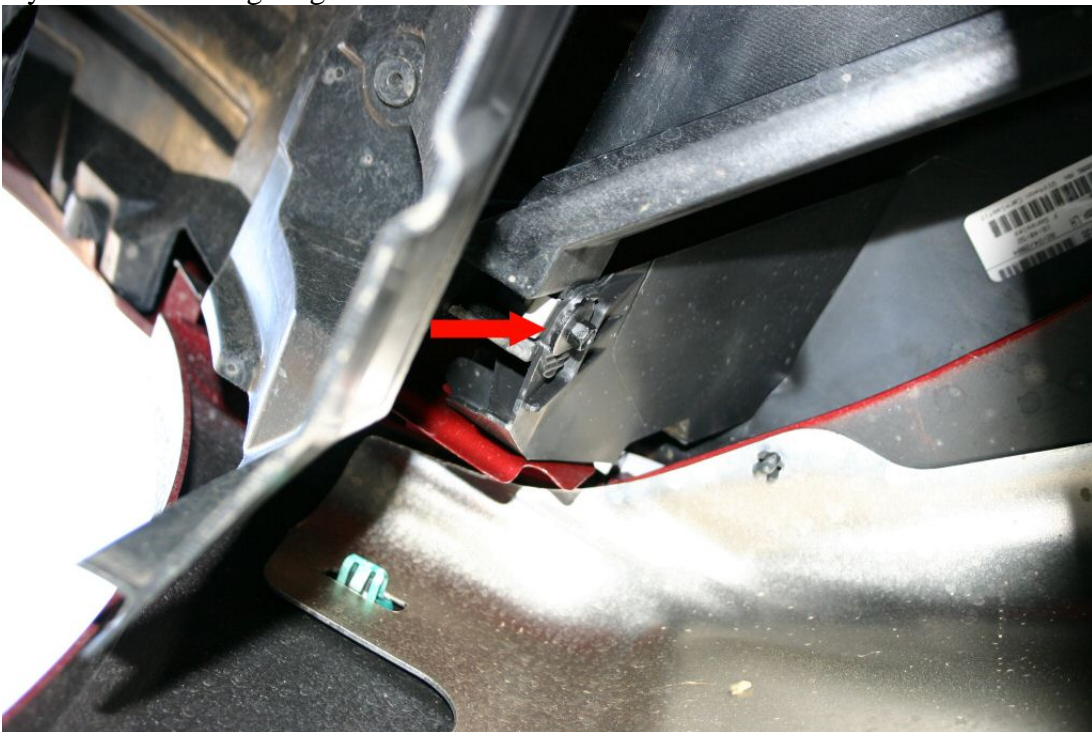

There is a 4th bolt that's hidden behind the bumper and is not easy to get to. You do not need to remove this bolt.



With 3 bolts removed, you can now pull the headlight assembly far enough forward to access the bulbs. Unclip the plug from the back of the bulb.

Important note about halogen / xenon bulbs!!

DO NOT TOUCH the glass with your bare hands and do not get any grease or dirt on the bulb itself. The bulb gets very hot and foreign material can cause the bulb to overheat and burst or crack. It is recommended to use rubber gloves to handle bulbs.


To remove the bulb, rotate the bulb counter-clockwise 1/8 turn (looking from the top) and pull the bulb straight out. Install the replacement bulb in the reverse order. Repeat for the other bulb(s).

Now is a good time to make sure the new bulb(s) work. It would be a lot of wasted work if you reassembled everything only to find that one of the bulbs was bad.

Reassembly is simply the reverse of removal. Reinstall the 3 bolts that hold the headlight assembly in place.

Remove all 8 clips from the front of the truck and install in their respective locations on the grill. To remove the clip simply squeeze the top and bottom lip using pliers.

It takes a little bit of effort to snap the clips back onto the grille.

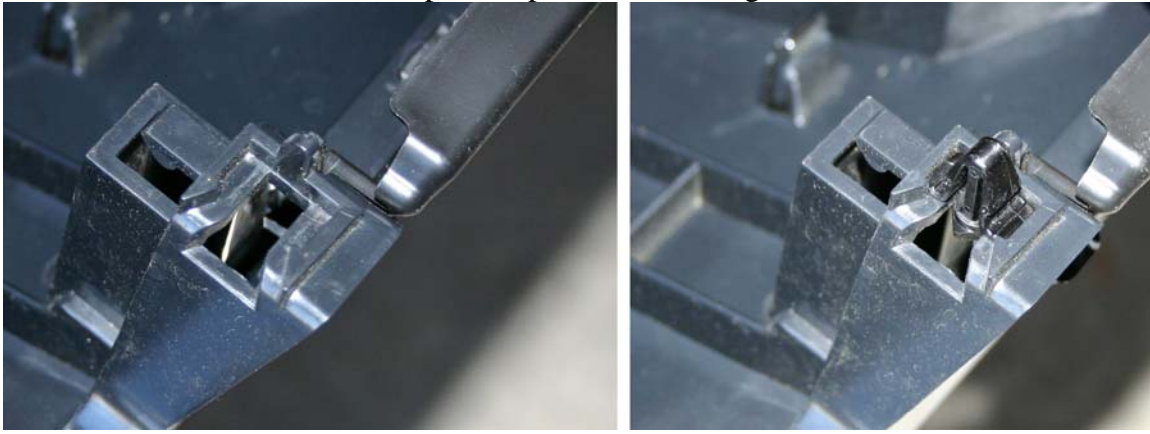

Reinstall the grill by positioning the 12 clips over the holes and snap into place.

Now you're done.